

# HARDWOOD FLOOR MAINTENANCE OIL



**SHERWIN-WILLIAMS**

# AEROGREEN® 4200 HARDWOOD FLOOR MAINTENANCE OIL

## AEROGREEN 4200 HARDWOOD FLOOR MAINTENANCE OIL

- Enhances the beauty of your oiled wood floors by deeply penetrating the wood and bonding to it at the molecular level - leading to stronger wood that retains its texture and color. Over time, the oil will produce a natural sheen from wear and polishing as the wood ages.
- Can be used on all types of oiled wood floors.
- Delivers a natural glow to your wood floors. Once the floor is completely dry, the shine can be enhanced by buffing the floor with a soft pad or buffing machine.
- Provides additional hard-wearing protection in your floor's upper pore layer while also producing a natural finish that highlights the wood's grain and color.
- Contains no solvents or hazardous chemicals.
- Produces a light, pleasant scent.
- Can be applied by hand with a clean cloth or mop, lambs wool or paint roller - all of which can be washed with soap and water for reuse.

### ADDITIONAL BENEFITS INCLUDE:

- Non-flammable/non-combustible
- Low to no VOCs
- Non-hazardous
- Can ship by air
- Density lbs./gal - 8.2

### AEROGREEN 4200 MAINTENANCE OIL

SMIS NUMBER	PART NUMBER	SIZE
1017-63118	000420014	32 oz.
1017-63191	000420016	1 gallon
1017-63209	000420020	5 gallon



Preserve and protect the organic beauty of your wood floors with a unique blend of natural oils formulated to penetrate wood and highlight its natural grain.

## DIRECTIONS FOR USE

**Preparation:** Clean the floor with AEROGREEN® 4220 Wood Floor Cleaner to remove any dirt on the surface. Allow 8-12 hours of dry time before applying the maintenance oils to the surface. The floor must be completely dry.

**Coverage:** 400-450 sq. ft. per quart (37-41 m<sup>2</sup> per liter). Pour 4 ounces of oil for every 50 sq. ft.

**Application:** Apply AEROGREEN 4200 Maintenance Oil to one small area at a time, working the oil into the wood with a clean cloth, mop, lambs wool pad or paint roller. For large areas use a polish machine.


Continue to carefully polish the maintenance oil into the wood until the wood surface appears saturated and uniform. Lightly buff the surface dry with a clean pad. There should not be any excess oil left on the surface. Continue to the next section and repeat the process until the entire floor is completed.

**Drying:** The floor will be dry to the touch in 1-2 hours and fully dried in 24 hours for foot traffic. Do not expose the floor to water during the drying process. Once the floor is completely dry, additional buffing can be performed to enhance shine.

**Cleaning Tools:** Wash tools, pads and cloths with soap and water.

**Maintenance:** Use AEROGREEN 4220 Wood Floor Cleaner to remove dirt and grime. Your best defense against scratches and surface damage is to dust your floors with a microfiber mop or cloth daily. Use AEROGREEN® 4210 Revitalizer once a month and AEROGREEN 4200 Maintenance Oil every three months to preserve the natural beauty of your floors.

**Safety/Caution:** Avoid getting maintenance oil into the eyes. Goggles are recommended to protect the eyes from splashing. If contact occurs, flush eyes with running water. If irritation persists, seek medical attention. May cause skin irritation. Wash thoroughly after handling.

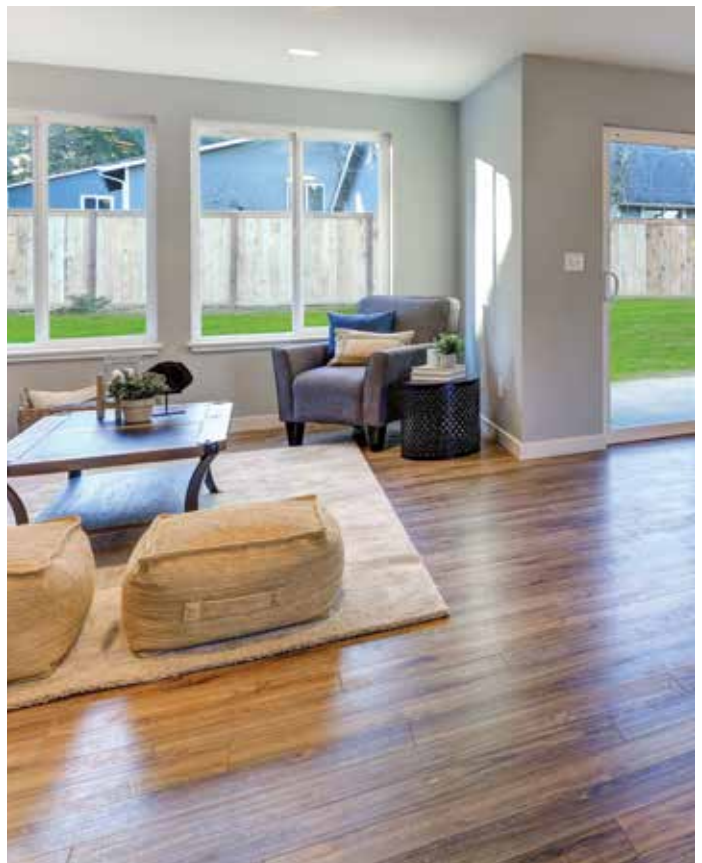

# HARDWOOD FLOOR MAINTENANCE OIL

---

Since 1866, Sherwin-Williams has provided manufacturers and finishers with the coatings they need to make their products look better and last longer, while helping their operations meet productivity and sustainability goals. Our innovative solutions go beyond coatings to include knowledge, tools, equipment, supplies and industry-leading support. For a better finish, ask Sherwin-Williams.

To learn more, call 1-844-335-5940 or visit us at [wood.sherwin.com](http://wood.sherwin.com)